
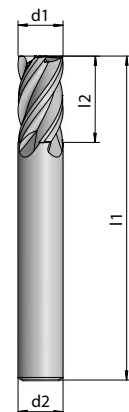


SHANK END MILLS

S 1130

Short version					
Article no.	d1	d2	l1	l2	Euro
11300400	4	4	48	8	29,00
11300500	5	6	48	10	29,00
11300600	6	6	50	12	30,00
11300800	8	8	57	16	39,00
11301000	10	10	66	20	52,00
11301200	12	12	76	24	72,00
11301600	16	16	90	32	136,00
11301800	18	18	94	36	155,00
11302000	20	20	98	40	181,00
11302500	25	25	120	50	285,00

From shaft Ø 6 mm add abbreviation HB for Weldon.
 Example 11300400 becomes 11300400HB

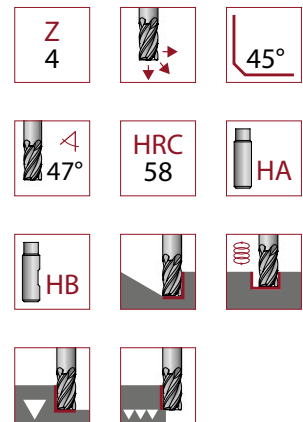

Shoulder milling	$a_p \times a_e = 2d \times 0.5d$
Slot milling	$a_p \times a_e = 0.65d \times 1d$



Cutting data for short version		Shoulder	Slot	
Material	N/mm ²	v _c m/min		
P	Gen. structural/ case hard. steels 1.0037 1.0570 1.0503 1.7131	< 800	140	120
	Tool/ tempering steels 1.2367 1.2379 1.7225	< 1100	120	90
	Alloyed/ cold work steels 1.2312 1.2767 1.3505 1.7707	< 1400	100	-
M	Stainless steels 1.4301 1.4305 1.4034	< 750	100	-
	Stainless steels 1.4435 1.4571	< 850	75	-
K	Cast iron GG25 GG40 GGG40	< 450	100-150	80-130
	Spherical cast iron GGG50 GGG60 GGG70	< 650	100-150	80-130
H	Hardened steel HRC 45-50	-	50-70	40-60
	Hardened steel HRC 51-58	-	30-50	-

d1	Shoulder	Slot
	fz mm	
4	0.035	0.010
5	0.040	0.015
6	0.050	0.025
8	0.060	0.030
10	0.070	0.040
12	0.100	0.060
16	0.110	0.070
18	0.120	0.090
20	0.150	0.100
25	0.160	0.110