



# ECKFRÄSER

## LN90




Mit Plattengrößen für extrem hohe Schnitttiefen  
in der 90°-Bearbeitung  
Enorme Stabilität durch massiven Schneidkeil  
Erzielt exzellente Oberflächengüten  
beim Schruppen und Schlichten

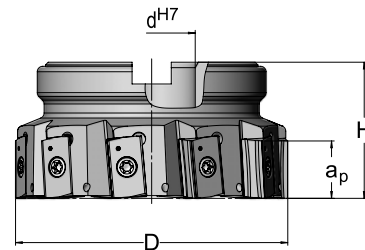

| LN90<br>Aufsteckfräser |     |                 |    |                  |                |    |      | WSP         |
|------------------------|-----|-----------------|----|------------------|----------------|----|------|-------------|
| Artikel                | D   | d <sup>H7</sup> | H  | Z <sub>eff</sub> | a <sub>p</sub> | lk | kg   |             |
| 04L.0550.003           | 50  | 22              | 50 | 5                | 20,0           | ja | 0,52 | LN..2208..L |
| 04L.0650.005           | 63  | 22              | 50 | 6                | 20,0           | ja | 0,84 | LN..2208..L |
| 04L.0850.005           | 80  | 27              | 50 | 8                | 20,0           | ja | 1,33 | LN..2208..L |
| 04L.1050.005           | 100 | 32              | 50 | 10               | 20,0           | ja | 2,05 | LN..2208..L |
| 04L.1263.005           | 125 | 40              | 63 | 13               | 20,0           | ja | 3,54 | LN..2208..L |

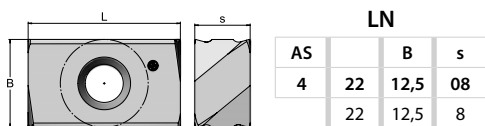

# WSP-FORM LN



Zuteilung Zerspanparameter  
zu den AV Materialgruppen

|            |                      |                   |           | Stahl   |         |         |     |     |     |     |
|------------|----------------------|-------------------|-----------|---------|---------|---------|-----|-----|-----|-----|
| Artikel    |                      | Bezeichnung       |           | A22     | A21     | A20     | A19 | A18 | A17 | A16 |
| LN..2208.. | LN.2208.003.01 SKY77 | LNHQ 220805 SL-28 | $h_{max}$ | 0,23    | 0,20    | 0,18    | -   | -   | -   | -   |
|            |                      |                   | $v_c$     | 280-320 | 220-280 | 180-230 | -   | -   | -   | -   |

|            |                                    |                   |           | Guss    |         |         |         |         |         |
|------------|------------------------------------|-------------------|-----------|---------|---------|---------|---------|---------|---------|
| Artikel    |                                    | Bezeichnung       |           | D21     | D20     | D19     | D18     | D17     | D16     |
| LN..2208.. | LN.2208.003.01 SKY77               | LNHQ 220805 SL-28 | $h_{max}$ | -       | -       | -       | 0,20    | 0,16    | 0,12    |
|            |                                    |                   | $v_c$     | -       | -       | -       | 150-190 | 120-160 | 120-150 |
|            | LN.2208.003.01 CAN <sup>2</sup> 77 | LNHQ 220805 SL-28 | $h_{max}$ | 0,28    | 0,26    | 0,22    | 0,20    | 0,16    | 0,12    |
|            |                                    |                   | $v_c$     | 300-380 | 270-320 | 230-280 | 170-220 | 150-200 | 120-150 |

| WSP         |  |  |
|-------------|---|---|
| LN..2208... | 08B.0513.7991   | TX220   |