


# FRESE PER SPALLAMENTO

## SN90




**NEWT**ool

Angolo Kappa 90°  
Economica, con inserto  
tangenziale SN a 8 taglienti  
Robusta e dal taglio dolce,  
ideale per la fresatura di ghisa



SN90 frese a manicotto								INS
articolo	D	d <sup>H7</sup>	H	Z <sup>eff</sup>	a <sub>p</sub>	RI	kg	
04S.0540.090	50	22	40	5	9,0	si	0,40	SN.1208..L
04S.0640.090	63	22	40	7	9,0	si	0,60	SN.1208..L
04S.0850.090	80	27	50	9	9,0	si	1,15	SN.1208..L
04S.1050.090	100	32	50	10	9,0	si	1,85	SN.1208..L
04S.1263.090	125	40	63	12	9,0	non	2,85	SN.1208..L
04S.1663.090	160	40	63	16	9,0	non	4,25	SN.1208..L

# FORMA INS. **SN**

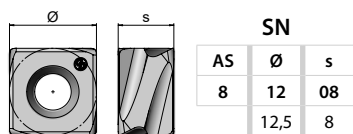

Parametri di taglio consigliati  
rispetto ai gruppi di materiali AV

				ghisa					
articolo		descrizione		D21	D20	D19	D18	D17	D16
SN..1208..	SN.1208.090.01 NERO <sup>277</sup>	SNHQ 120808 SL-28	h <sub>max</sub>	0,28	0,26	0,22	0,2	0,17	0,15
			v <sub>c</sub>	260-320	240-280	200-240	180-220	160-200	120-160
	SN.1208.090.02 NERO26	SNHQ 120808 SL-25	h <sub>max</sub>	0,28	0,26	0,22	0,20	0,17	0,15
			v <sub>c</sub>	260-320	240-280	200-240	180-220	160-200	120-160
	SN.1208.094.01 NERO <sup>277</sup>	SNFQ 120808 EL-33	f <sub>n</sub>	3,50	3,50	3,50	3,50	3,50	3,50
			v <sub>c</sub>	260-320	240-280	200-240	180-220	160-200	120-160

INS		
SN..1208..L	08B.0416.7991	TX215